


BASIC A

DOUBLE HEAD CUTTING OFF MC

Gemma Group srl - Via Dante Alighieri 6,
47852 Coriano (RN) - Italy
0039 0541 905810

www.gemma-group.com
info@gemma-group.com

BASIC A

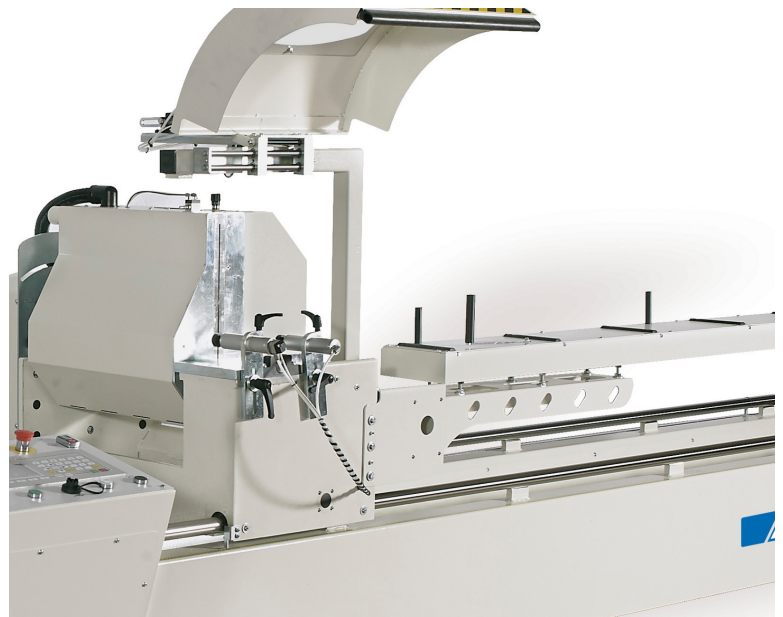

- Double head cutting off machine with a fixed sawing head on the left and one movable on the right side.
- Automatic positioning of the movable head and electronic tilting of the sawing units. Motorised tilting of the sawing heads ALL DEGREES between 20° / 135°.
- Lubrication by Micro Drop with pure oil.
- Brushless motor for axe positioning.
- Numerical control with 3 positioning axes of the latest generation integrated in the function of a personal computer with 10,4" colour display TOUCH SCREEN.
- Software HICAM 2 for creating and controlling, highly ergonomic and of easiest use.
- Possibility of tele-assistance via internet. Pc with Windows 10 + wifi.

STANDARD EQUIPMENT

Nr. 2 TCT Saw Blades 500mm
Safe guards on the cutting area
Nr.4 Horizontal pneumatic clamps
Micro drop oil lubrication
Air gun 6mtrs length
Movable side support
Air filter

OPTIONALS

TCT Saw Blade D.500mm (spare)
Nr.2 Vertical pneumatic clamps
Automatic device measuring profile height
Label printer
Motorized belt conveyor
Pneumatic central support

BASIC A

GENERAL SPECIFICATIONS

Blade diameter:	500 mm
Spindle diameter:	30 mm
Number of blade revs:	2760 giri/1' r.p.m.
Cutting speed:	80 m/sec
Advancement speed :	adjustable
Minimum cutting length (between two blades) :	320 mm
Maximum cutting length (between two blades) :	4600 mm
Air consumption for cycle :	32 NI.
Cutting angles :	20° ÷ 135°
Working pressure:	7 bar
Motor power:	50 Hz / 1.8 kW
Motor power:	60 Hz / 2.2 kW

PROFILO: capacità taglio (mm)
PROFILE: cutting capacity (mm)



90°


155x155

220x140 / 270x100

45°

145x145

155x140 / 190x100



mm

kW

kg


mm

500

1,8

1600

6300x1000x1400

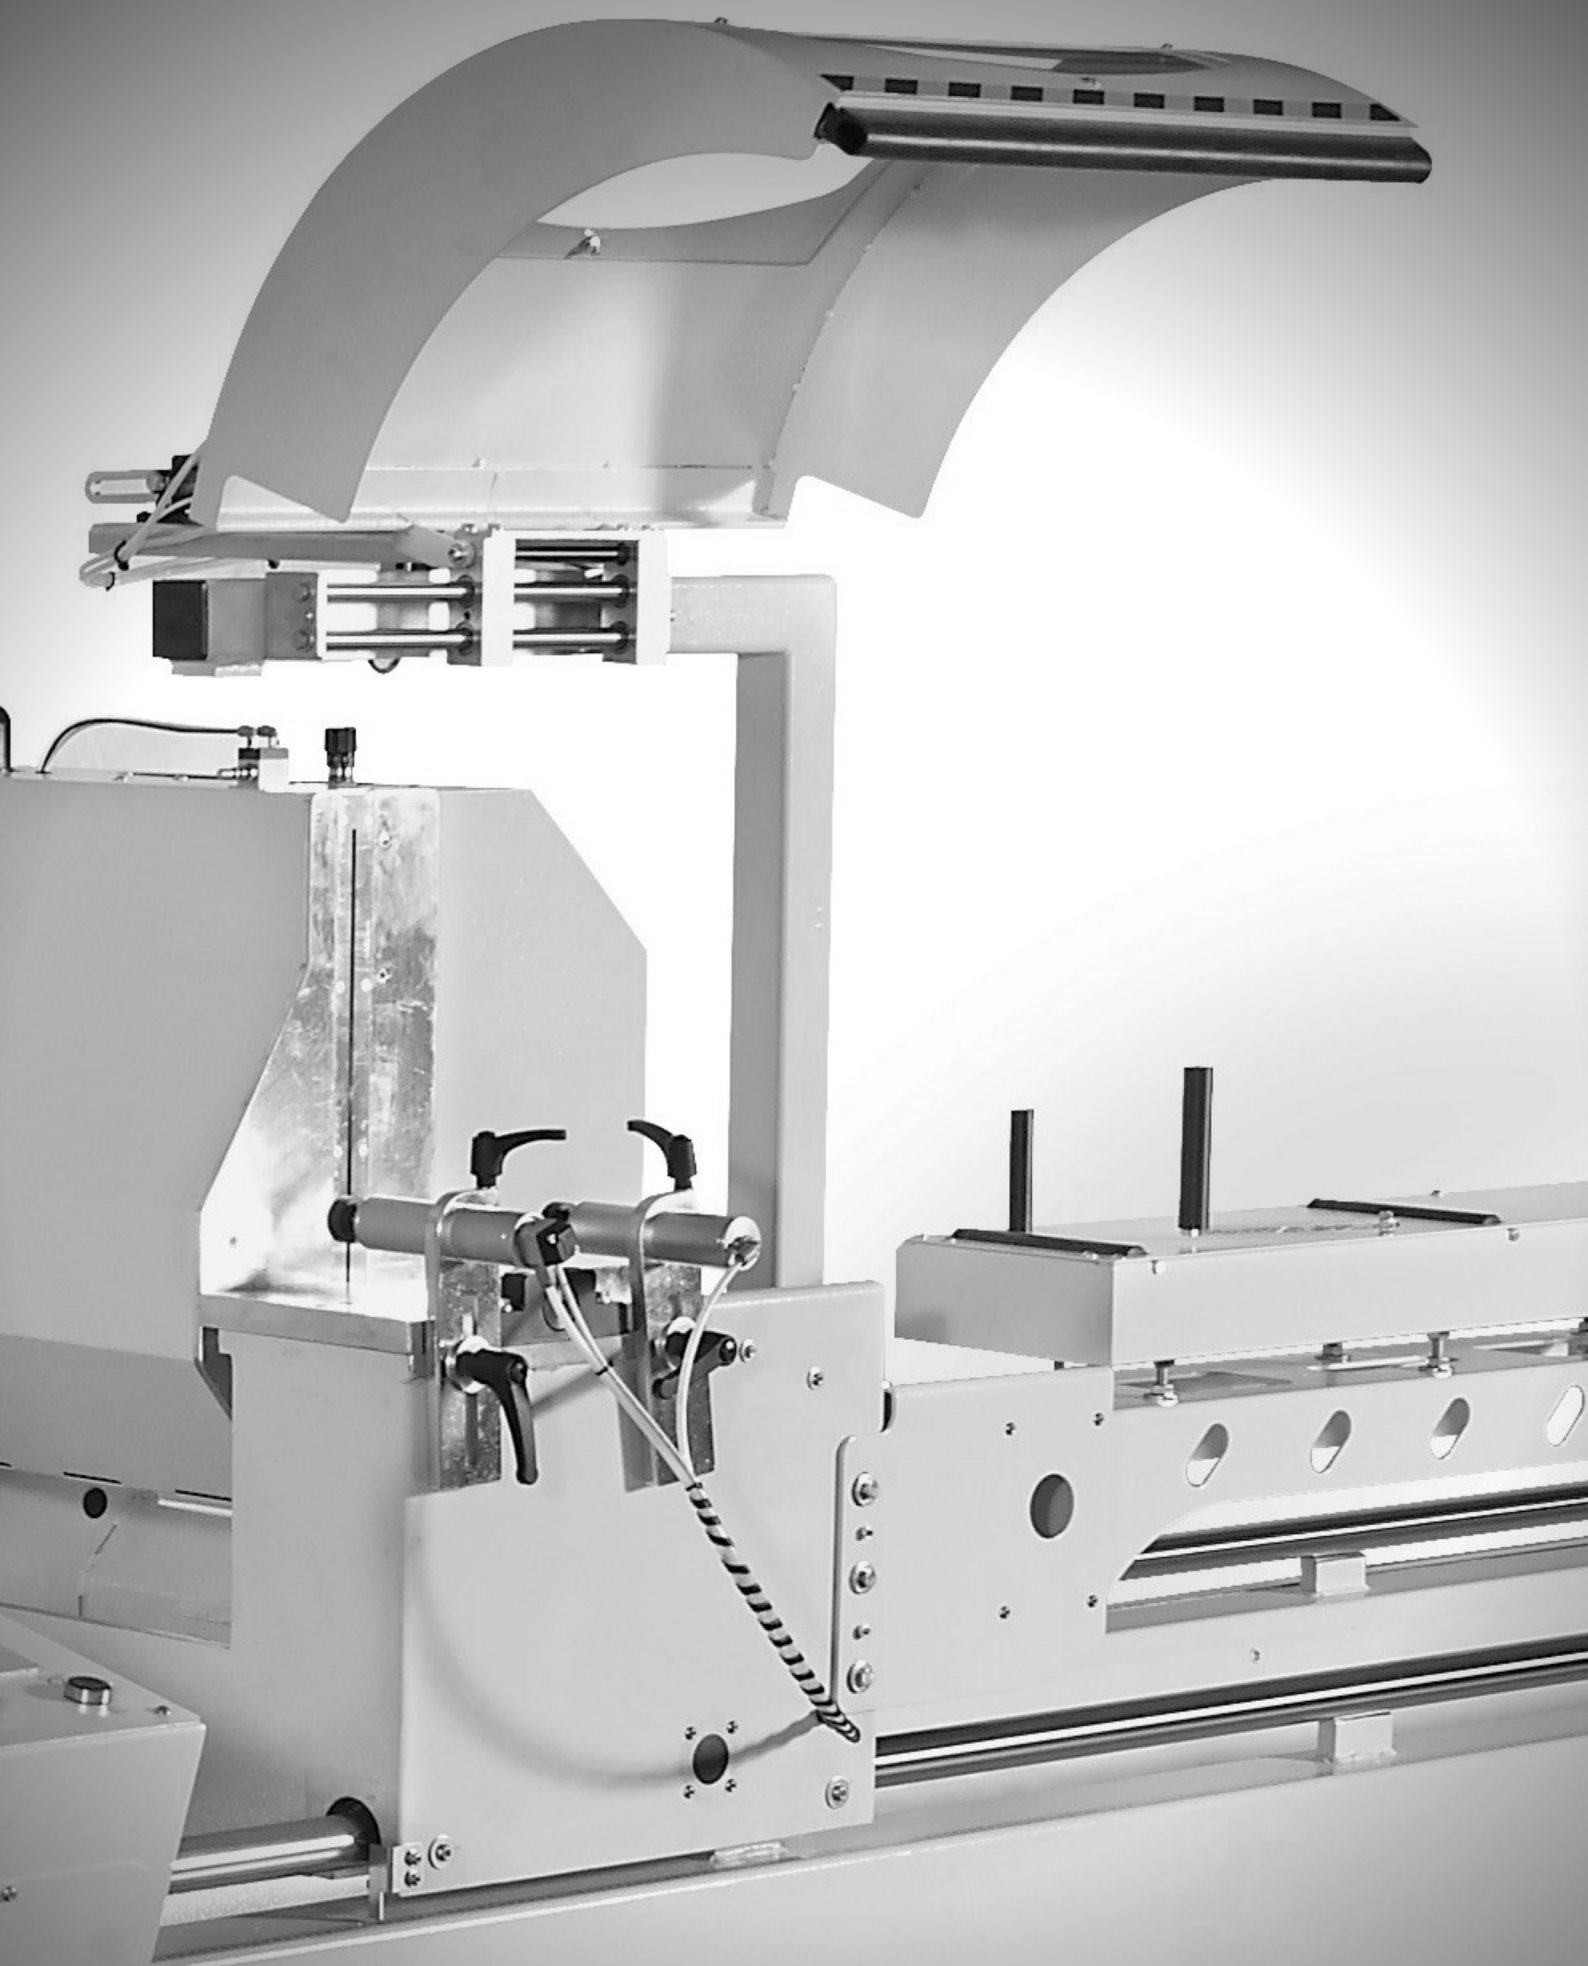

**Gemma
Group**